

# IQ Wave SP

THORN

96629268 IQ SURF S LED4250-830 HF

|      |      |  |  |  |  |       |                           |
|------|------|--|--|--|--|-------|---------------------------|
| IP40 | IK05 |  |  |  |  | 650°C | T <sub>a</sub> -20<br>+25 |
|------|------|--|--|--|--|-------|---------------------------|


## IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech optic. Electronic, fixed output control gear. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Complete with 3000K LED

Dimensions: 1140 x 210 x 70 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4000 lm  
Luminaire efficacy: 100 lm/W  
weight: 4 kg



TLG\_IQSU\_F\_SUP\_PDB.jpg

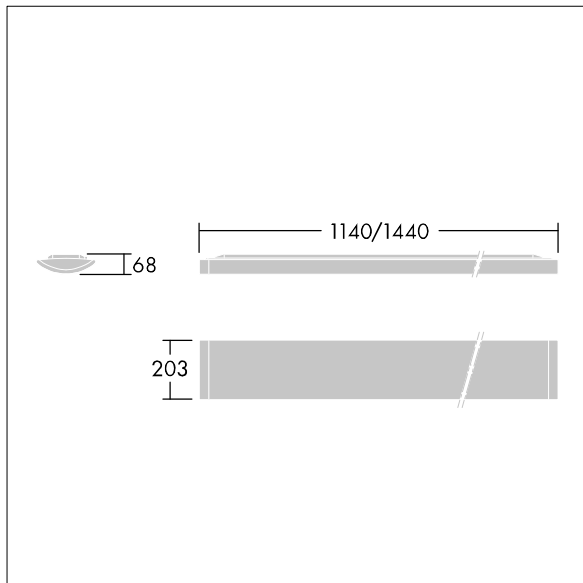

TLG\_IQSU\_M\_SUR.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**IQ Wave SP**

**96629268 IQ SURF S LED4250-830 HF**

**THORN**