

IQ Wave SP

THORN


92909350 IQ SURF L LED6700-840 HF E3TX-C WH

| | | | | | | | |
|------|------|--|--|--|--|-------|---------------------------|
| IP40 | IK05 | | | | | 650°C | T _a -20 +25 |
|------|------|--|--|--|--|-------|---------------------------|


IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech optic. Electronic, fixed output control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Cable entry only possible via central hole. Complete with 4000K LED

Dimensions: 1440 x 210 x 70 mm
Luminaire input power: 61 W
Luminaire luminous flux: 6700 lm
Luminaire efficacy: 110 lm/W
weight: 4.6 kg

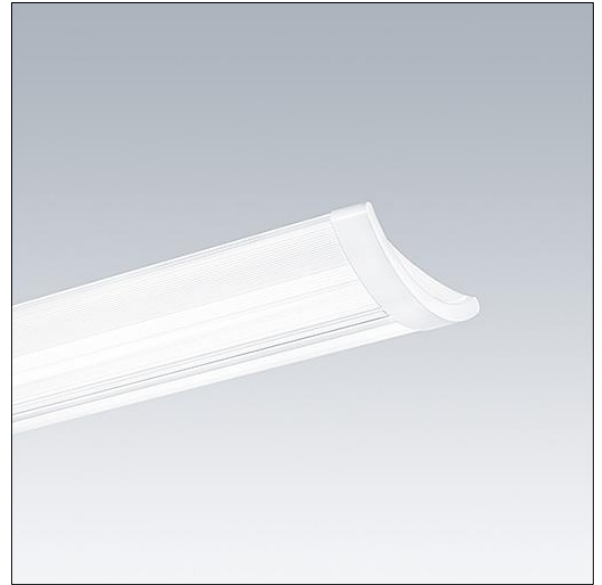

TLG_IQSU_F_SUP_PDB.jpg

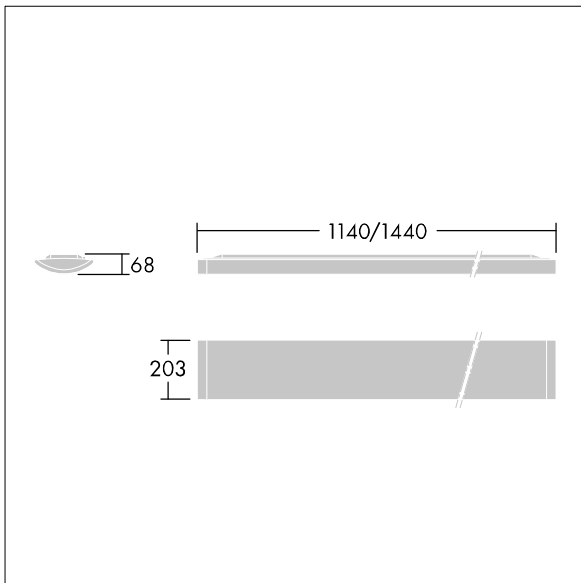

TLG_IQSU_M_SUR.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Wave SP

92909350 IQ SURF L LED6700-840 HF E3TX-C WH

THORN