


Voyager Star

96633233 VOYAGER STAR P MSC SPOT ECP WH

THORN



Voyager Star

High performance, surface mounted LED emergency lighting luminaire, with optic.. Housing: aluminium die casting alloy, powder coated white (close to RAL9016). Gear tray: galvanised steel sheet. Lens: polycarbonate. IP40,. Luminaire can be installed quickly and maintained without tools. Electrical connection (230VAC) via maximum 2.5mm² cable, loop in - loop out possible. Optimum thermal management via heat sink. Complete with LEDs..


Luminaire input power: 3.6 W

Dimensions: 146 x 146 x 34 mm

Weight: 0.65 kg



TLG_VSTR_F_MSC_side_ECx_SPOT_WH.jpg

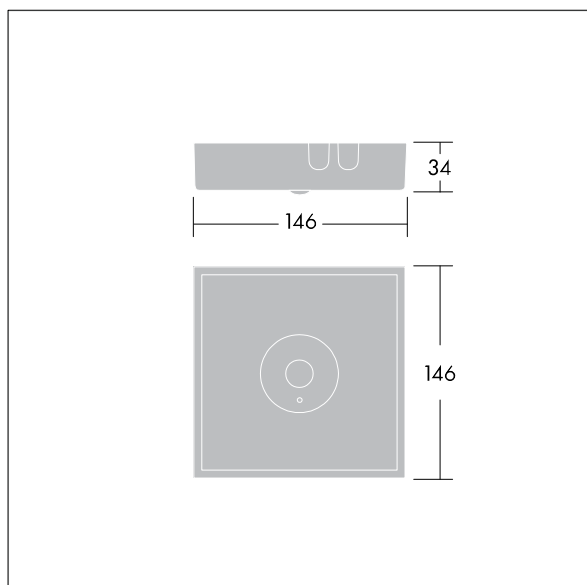

TLG_VYLD_M_MCE SPOT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Voyager Star

96633233 VOYAGER STAR P MSC SPOT ECP WH

THORN