







Omega Pro 2

92916358 OP2 3000-840 CKIT+ HX BC Q600

THORN

IEC EN 60598-1 RG 0			IK03					650°C	T _a 0 +35	
---------------------------	---	---	------	---	---	---	---	-------	-------------------------	--

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless controlled via App with Bluetooth® 4.
x - basicDIM Wireless. Class II electrical (this product is not
earthed), IP40_IP20, Impact strength: IK03. Body: steel
sheet, finished white (close to RAL9016). Diffuser: UV-
stabilised polycarbonate hexagonal comfort optic with
central control pod hole. Electrical connection via 7 pole
piano key terminals, loop-in/loop-out possible. Complete
with 4000K LED, Colour Rendering Index min.: 80

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 22.3 W
Luminaire luminous flux: 3000 lm
Luminaire efficacy: 135 lm/W
Weight: 5.44 kg



TLG_OMP2_F_RH_PDB.jpg

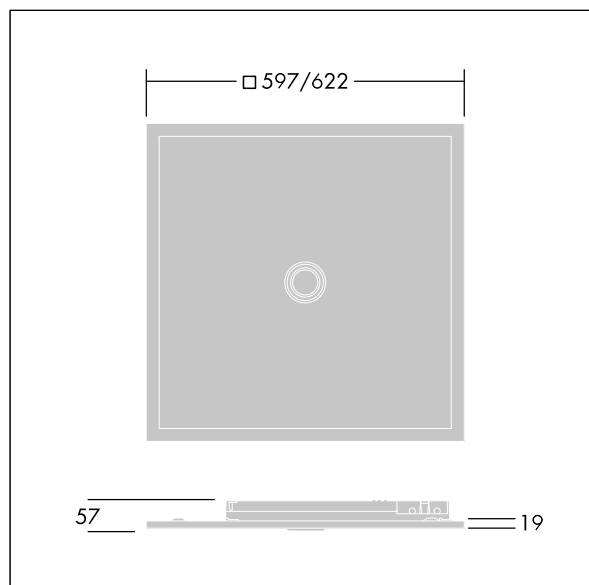

TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting