

## Contrast

96633438 CONT3 4L50-822-40 NB NG IO ANT

|                |  |      |      |  |  |  |                           |
|----------------|--|------|------|--|--|--|---------------------------|
| ISO 9223<br>C5 |  | IP66 | IK08 |  |  |  | T <sub>a</sub> -20<br>+35 |
|----------------|--|------|------|--|--|--|---------------------------|


### Contrast

A small architectural Bracket mounted LED floodlight with LEDs driven at 500mA and a narrow beam distribution. . . Pre-wired with IP66 connector, gear box to be ordered separately. Class II electrical (this product is not earthed), IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with 2200-4000K balanced white LEDs

Dimensions: Ø83 x 103 mm  
 Luminaire input power: 7 W  
 Luminaire luminous flux: 409 lm  
 Luminaire efficacy: 58 lm/W  
 Weight: 1.03 kg



TLG\_CON3\_F\_XS.jpg

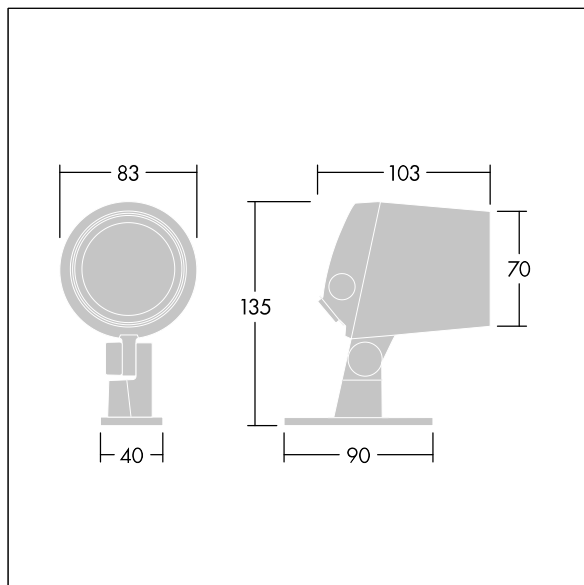

TLG\_CONL\_M\_4L.wmf

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

# Contrast

96633438 CONT3 4L50-822-40 NB NG IO ANT

THORN