

Omega Pro 2

92916993 OP2 3800-840 CKIT OP BC Q600

THORN


IEC EN 60598-1 RG 0		IK03					650 °C
---------------------------	---	------	---	---	---	---	--------

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless controlled via App with Bluetooth® 4.
x - basicDIM Wireless. Class II electrical (this product is not
earthed), IP44_IP20, Impact strength: IK03. Body: steel
sheet, finished white (close to RAL9016). Diffuser: UV-
stabilised polymethylmethacrylate opal optic for wide light
distribution. Electrical connection via 7 pole piano key
terminals, loop-in/loop-out possible. Complete with 4000K
LED, Colour Rendering Index min.: 80

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 29.1 W
Luminaire luminous flux: 3600 lm
Luminaire efficacy: 124 lm/W
Weight: 5.44 kg

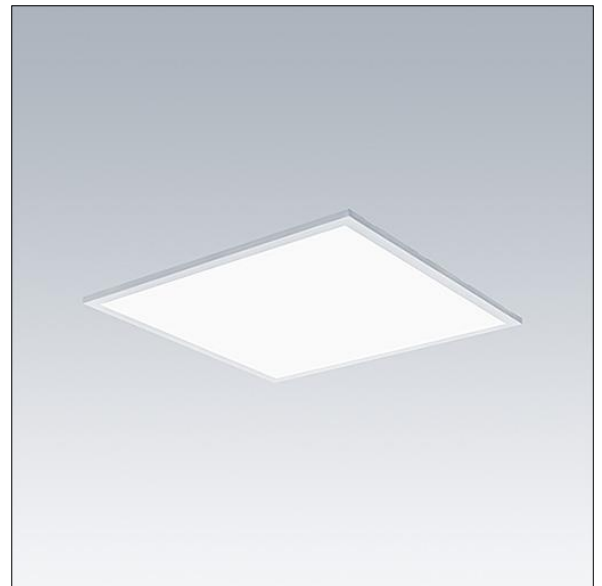

TLG_OMP2_F_QO_PDB.jpg

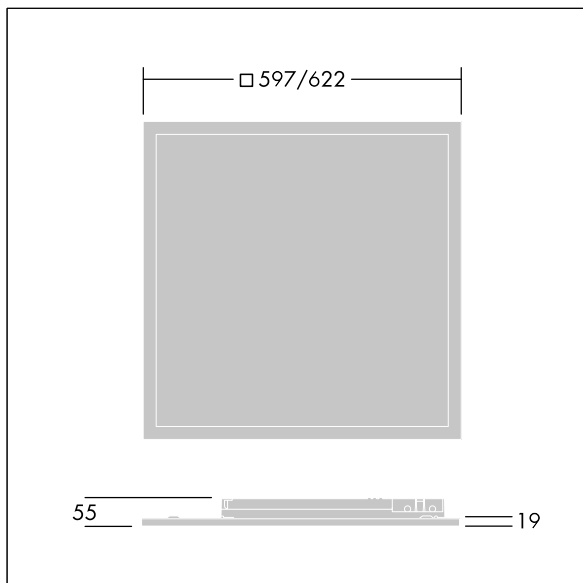

TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92916993 OP2 3800-840 CKIT OP BC Q600

THORN