

Omega Pro 2

THORN

92917293 OP2 3800-840 CKIT+ MPT BC E3 Q600

+ ESC: escape route emergency optic

IEC EN 60598-1 RG 0			IK03				650°C	Ta 0 +35	
---------------------------	--	--	------	--	--	--	-------	-------------	--


Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless controlled via App with Bluetooth® 4.
x - basicDIM Wireless with 3 hour, manual test, emergency lighting circuit. Class II electrical (this product is not earthed), IP40_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80


Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 57 mm
Luminaire input power: 29.1 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 131 lm/W
Weight: 5.95 kg

Equipped with:
Optics polycarbonate lens for escape emergency lighting.

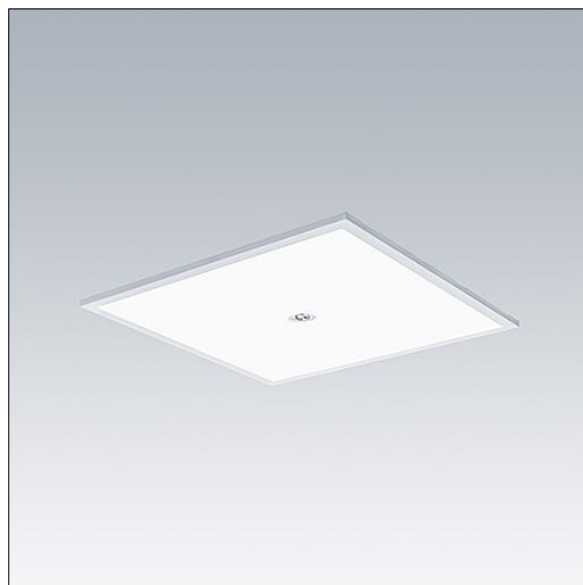

TLG_OMP2_F_QMPT_E3_PDB.jpg

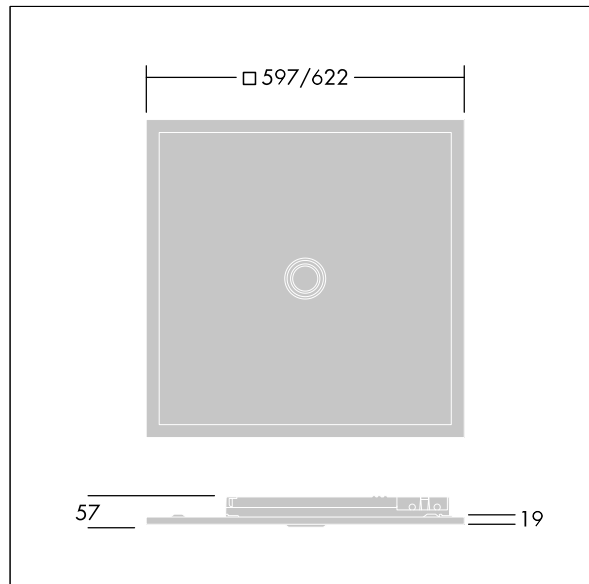

TLG_OMP2_M_QKIT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92917293 OP2 3800-840 CKIT+ MPT BC E3 Q600

+ ESC: escape route emergency optic

THORN