

Omega Pro 2

92914016 OP2 3800-840 CKIT+ HX E3 3X12

+ ESC: escape route emergency optic

| | | | | | | | | | | | |
|---------------------------|--|--|--|------|--|--|--|--|--|-------|-------------------------|
| IEC EN 60598-1 RG 0 | | | | IK03 | | | | | | 650°C | T _a 0 +35 |
|---------------------------|--|--|--|------|--|--|--|--|--|-------|-------------------------|

Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable with 3 hour, manual test, emergency lighting circuit. Class II electrical (this product is not earthed), IP40_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Dimensions: 1197 x 297 x 59 mm

Luminaire input power: 27.4 W


Luminaire luminous flux: 3800 lm

Luminaire efficacy: 139 lm/W


Weight: 6.09 kg

Equipped with:

Optics polycarbonate lens for escape emergency lighting.

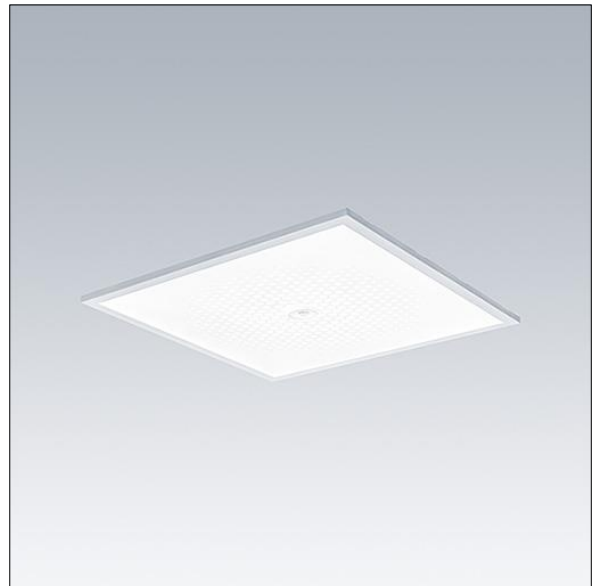

TLG_OMP2_F_QHPIR_PDB.jpg

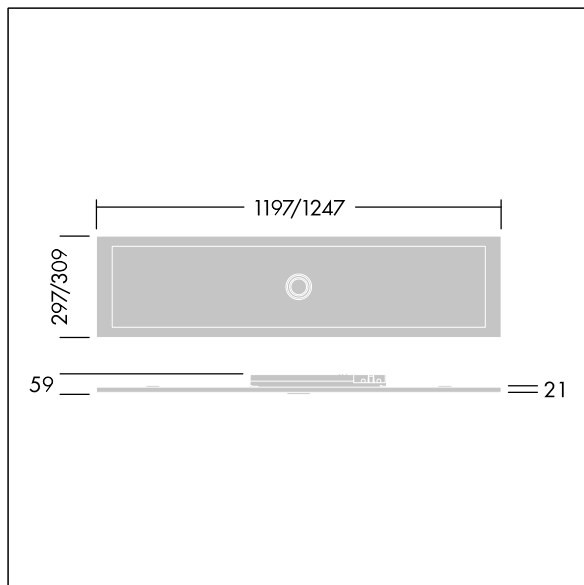

TLG_OMP2_M_LKIT.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92914016 OP2 3800-840 CKIT+ HX E3 3X12

+ ESC: escape route emergency optic

THORN