

# Novaline Style

THORN

96635362 NOVS M 3500-840 DI HFI E3D WH

IEC EN 60598-1 RG 1	RoHS	UK CA	IP54	D	halogen	IK08		CE			850°C	T <sub>a</sub> 0 +25	
---------------------------	------	----------	------	---	---------	------	--	----	--	--	-------	-------------------------	--


## Novaline Style

Decorative circular luminaire with medium body. Low indirect component for wall and ceiling illumination. Electronic, DALI dimmable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Aesthetic trim of the luminaire made of polycarbonate in white. Diffuser: opal polycarbonate. Class II electrical (this product is not earthed), IP54. Complete with 4000K LED.

Dimensions: Ø397 x 69 mm  
Luminaire input power: 24.6 W  
Luminaire luminous flux: 3500 lm  
Luminaire efficacy: 142 lm/W  
Weight: 2.42 kg



TLG\_NOVS\_F\_4WH.jpg

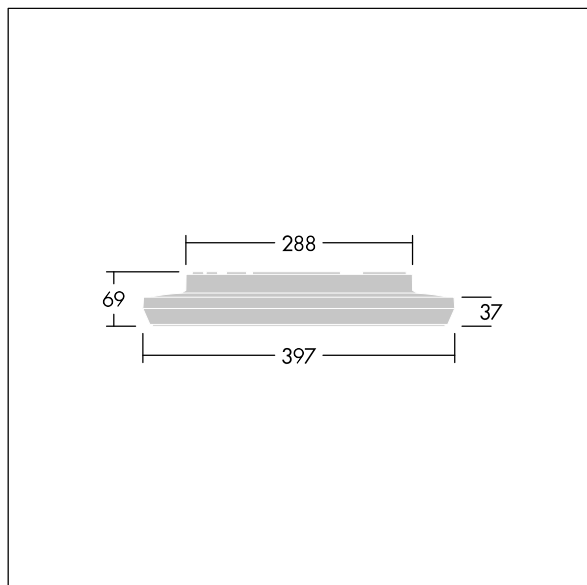

TLG\_NOVS\_M\_LD400.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Novaline Style**

**96635362 NOVS M 3500-840 DI HFI E3D WH**

**THORN**