








## 92984183 FORCELED 4000 840 MWS E3

	IP66			IK10					850°C	T <sub>a</sub> 0 +35	
---	------	---	---	------	---	---	---	---	-------	-------------------------	--

### ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, Integral presence detector for on/off control with 3 hour, manual test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with Microwave sensor Complete with 4000K LED.

ambient temperature: 0°C to +35°C

Dimensions: 735 x 180 x 95 mm  
Luminaire input power: 28.2 W  
Luminaire luminous flux: 4000 lm  
Luminaire efficacy: 142 lm/W  
Weight: 3.4 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

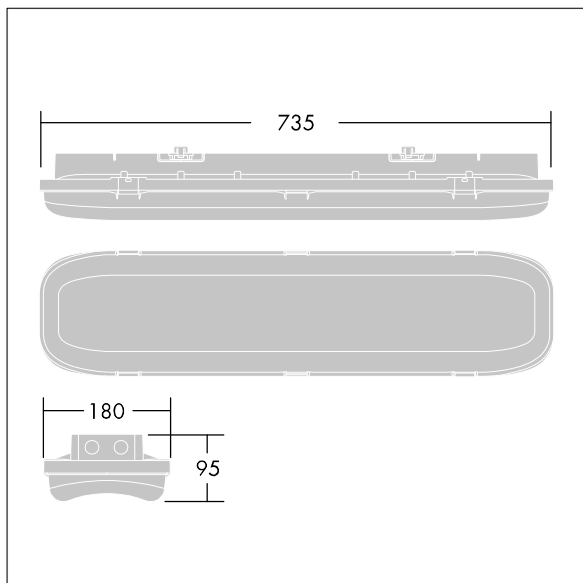

TLG\_FORL\_M\_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting