


92984183 FORCELED 4000 840 MWS E3



ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, Integral presence detector for on/off control with 3 hour, manual test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with Microwave sensor Complete with 4000K LED.

ambient temperature: 0°C to +35°C

Dimensions: 735 x 180 x 95 mm
 Luminaire input power: 28.2 W
 Luminaire luminous flux: 4000 lm
 Luminaire efficacy: 142 lm/W
 Weight: 3.4 kg



TLG_FORL_F_PDBUNLIT.jpg

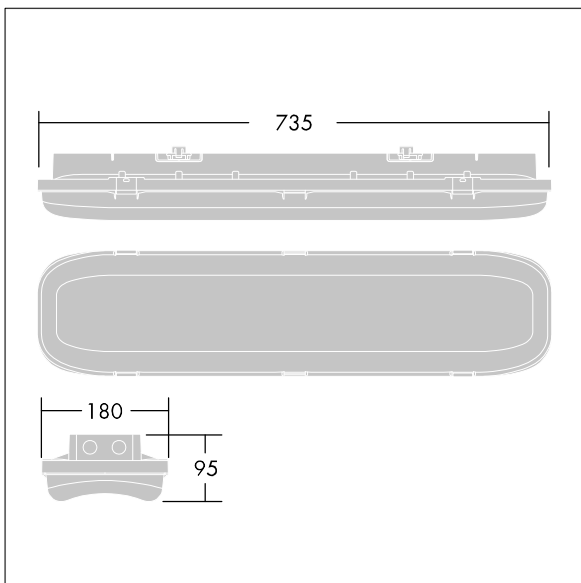

TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.